

Table of contents

HP ProLiant Servers: Introduction
HP ProLiant Servers: Entry-level 6
HP ProLiant Servers: Midrange
HP ProLiant Servers: High-end
HP ProLiant Servers: Multi-node (1000 series)
HP ProLiant Servers: Multi-node (6000 series) 27
HP ProLiant Servers: Supported options
HP related offerings: Infrastructure management software 30
HP related offerings: operating systems,
and virtual environments
HP related solutions: HP options
HP related offerings: HP storage
HP Technology Services
HP Financial Services
The right partner


HP ProLiant Servers: redefining server economics

In today's data centers, server consolidation and cost reduction are the top-of-mind concerns. With tough economic conditions and rising IT operations costs, the status quo won't do. If you're in a data center environment, you need to work aggressively to stop server and storage sprawl, reduce energy expenditures, and make better use of your valuable floor space—while responding faster to changing business requirements.

HP Converged Infrastructure solutions and services will help you meet these goals. They break down technology silos to bring all IT resources together into virtualized pools of assets that can be shared by many applications and managed as a service. This architecture goes beyond the current virtualization of servers, storage systems, and network connections. It brings together management tools, policies, and processes so resources can be managed in a holistic and integrated manner. It also brings together power and cooling practices so systems and facilities work synergistically to extend the life of your data center.

The HP ProLiant server portfolio offers key building blocks for your Converged Infrastructure. It doubles the performance of previous server generations and adds a wide range of innovative features that help you gain more value out of every IT dollar. HP ProLiant Servers deliver major advances in energy efficiency, virtualization, and management. We combine these innovations with comprehensive financing programs and service offerings to redefine server economics.

HP ProLiant Servers enable consolidation ratios of up to 20:1. This level of consolidation makes it possible for your organization to reduce power and cooling expenses by 97 percent, reduce software licenses by 95 percent, and reduce the number of physical servers to manage by 95 percent. With gains like these, your investment in ProLiant technology can pay for itself in as little as three months.

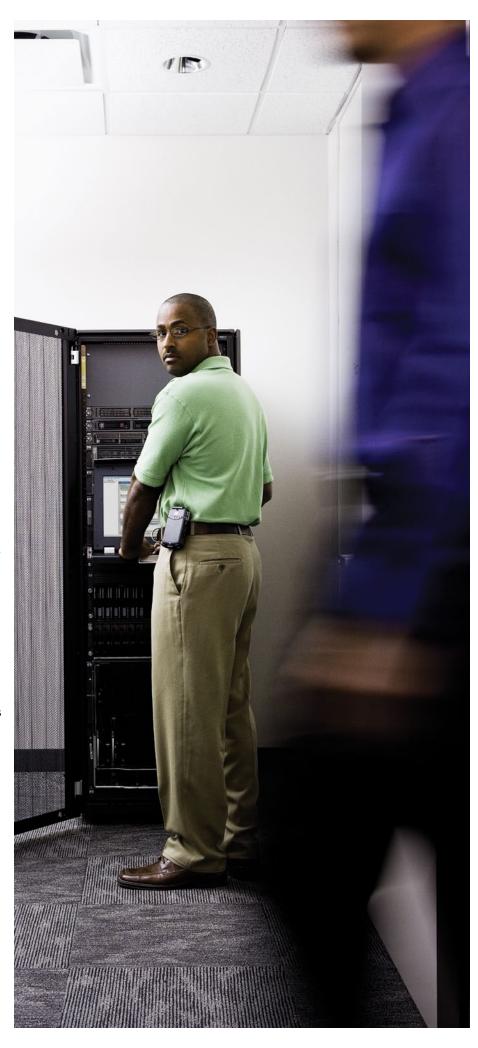

Achieve a more efficient IT environment with ProLiant. Complete data center solutions enabled with ProLiant need fewer resources and use less energy. With ProLiant, you can get server economics you can't ignore.

Find the server that's right for your needs

HP ProLiant systems are top-selling servers, and every third server sold worldwide is an HP server.* This high-level market acceptance stems in part from our ongoing commitment to provide a complete industry-standard server infrastructure that delivers confidence and reliability.

Whether it's a departmental server, an enterprise data center, or anything in between, HP can meet your exact needs. You can choose the right levels of performance, availability, expandability, and manageability from the world's most comprehensive industry-standard server and options portfolio.

HP ProLignt Servers

The HP ProLiant family includes:

- HP ProLiant Modular Line (ML): Flexible, expandable tower, and rack/tower options available for growing businesses in 1- and 2-socket designs, and entry and enterprise-class feature sets.
- HP ProLiant Density Line (DL): Powerful servers in 1, 2, 4, 7, or 8U configurations as well as multi-node server designs, all optimized for a rack-mounted server environment.
- HP ProLiant Scalable System (SL): A new server family that enables a shared server infrastructure optimized for extreme scale-out deployments.
- HP ProLiant Blade Servers (BL): Compact and powerful servers designed for performance, management, density, and total cost of ownership (TCO) savings requirements.

To explore these products online, visit: www.hp.com/go/proliant

ge, pronun

For more information, visit: **HP BladeSystem Family Guide**

HP Integrity Servers

In addition to the ProLiant server family, HP also offers the Integrity systems family—the one of the most-trusted brand for mission-critical environments requiring the highest reliability, availability, and serviceability (RAS) levels. A multi-OS ecosystem running HP-UX 11i, OpenVMS, Microsoft® Windows® Server, Linux, and NonStop, the Integrity platform provides a unique combination of mission-critical availability, virtualization, and scalability.

Additionally, you could also choose from the Integrity systems family that includes:

- HP Integrity NonStop Servers: Enabling the highest levels of availability for 24x7 business solutions
- HP Integrity Servers: Spanning from entry-class to Superdomes, with unique multi-OS capabilities and leading virtualization
- HP Integrity Server Blades: Bringing Integrity mission-critical capabilities to an HP BladeSystem c-Class form factor

To learn more about the HP Integrity server family, visit: www.hp.com/go/integrity

*Source: IDC Worldwide Quarterly Server Tracker 2008 Q4, February 2009

HP BladeSystem

Are you looking for ways to simplify a growing, multi-server environment? You can eliminate sprawl and drive business innovation with HP BladeSystem, the industry's only Converged Infrastructure architected for any workload from client to cloud. HP BladeSystem is engineered to maximize every hour, watt, and dollar, saving up to 56 percent total cost of ownership over traditional infrastructures.

To learn more about HP BladeSystem, visit: www.hp.com/go/bladesystem

A complete solution from HP

To gain the full value from your investments, you also need expert services across the IT lifecycle, intelligent software, advanced storage devices, and system-enhancing options. HP covers this broad spectrum of needs.

- Services: How important is it that your service partners provide a single point of ownership and accountability? Do they meet your service needs across your enterprise? From training and basic product support to proactive services for business-critical IT environments and selective outsourcing, our services help you realize the full potential of your technology to meet your business requirements.
- Remote support: Are you spending more time solving problems than focusing on your business? HP Insight Remote Support delivers secure remote support for HP servers and storage 24x7. With remote monitoring, automated notification, and accurate resolution, you can gain better control of your infrastructure, do more with less, and help your business stay up and running.
- Management software: Do you need to get more out of every hour, watt, and dollar you invest in your HP infrastructure—both physical and virtual?

- HP Insight management provides one of the most efficient, in-depth way to understand, manage, and optimize your technology infrastructure—in real time and over time.
- Operating systems: Do you need broad support for Windows, Linux, and UNIX® x86 operating systems? Our extensive OS testing, qualification, and certification give you the choice and flexibility to deploy a broad range of Windows, Linux, and UNIX x86 operating systems with confidence.
- Virtualization: Would you like to reduce costs, enhance availability, and increase agility within your data center? HP offers end-to-end virtualization solutions that comprehend industry-leading virtualization environments such as VMware, Citrix, and Windows Hyper-V, tested, certified, and supported on our leading ProLiant platforms, and integrated with Insight Control and Insight Dynamics. And HP knows that for high-availability environments, you need to virtualize your storage as well as your servers. Our P4000 family of physical and virtual SANs can make sure your data is as available as your applications.
- Storage: Do you need help optimizing your storage resources, managing multi-vendor environments, and evolving to open architectures? Our virtual SAN and direct-attached storage devices help you keep large amounts of information protected and readily accessible to people when needed.
- Options: Do you have everything you need to complete your infrastructure? Our server options—including memory, drives, processors, racks, operating system software, and power and cooling features strengthen the foundation of your data center with high-caliber products that are easy to maintain and tailored for ProLiant, Integrity, and StorageWorks, giving you confidence in your whole infrastructure.

HP ProLiant Servers—100 series

Affordable, entry-level rack and tower servers ideal for small to medium businesses, workgroups, remote sites, and high-performance computing environments.

Entry-level





HP ProLiant ML110 G5
Perfect first server for growing busing

HP ProLiant ML110 G6 Perfect first server for growing busing

	Perfect first server for growing business	Perfect first server for growing business
Number of processors	1	1
Maximum number of cores	4	4
Processors supported	Quad-Core Intel® Xeon® processors: X3370: 3.00 GHz, 1333 MHz, 95 W X3360: 2.83 GHz, 1333 MHz, 95 W X3330: 2.66 GHz, 1333 MHz, 95 W X3220: 2.40 GHz, 1066 MHz, 95 W X3210: 2.13 GHz, 1066 MHz, 95 W Dual-Core Intel Core™2 Duo processor: E7400: 2.80 GHz, 1066 MHz, 65 W Dual-Core Intel Xeon processors: E3120: 3.16 GHz, 1333 MHz, 65 W E3110: 3.00 GHz, 1333 MHz, 65 W Dual-Core Intel Pentium processor: E2160: 1.80 GHz, 800 MHz, 65 W Single-Core Intel Celeron processors: 440: 2.00 GHz, 800 MHz, 35 W	Quad-Core Intel Xeon processors: X3460: 2.80 GHz, 1333 MHz, 95 W X3450: 2.66 GHz, 1333 MHz, 95 W X3440: 2.53 GHz, 1333 MHz, 95 W X3430: 2.40 GHz, 1333 MHz, 95 W Dual-Core Intel Core i3 processor: i3-540: 3.06 GHz, 1333 MHz, 73 W i3-530: 2.93 GHz, 1333 MHz, 73 W Dual-Core Intel Pentium® processor: G6950: 2.80 GHz, 1066 MHz, 73 W Dual-Core Intel Celeron® processor: G1101: 2.26 GHz, 1066 MHz, 73 W
Cache	12 MB L2: Xeon X3370, X3360 8 MB L2: Xeon X3220, X3210 6 MB L2: Xeon X3330, E3120, E3110 3 MB L2: Core2 E7400 1 MB L2: Pentium E2160 512 KB L2: Celeron 440	8 MB: Xeon series 4 MB: Core i3 series 3 MB: Pentium processor 2 MB: Celeron processor
Maximum memory	8 GB	16 GB
Drives supported	Up to 4 non hot-plug LFF drives: SAS 3G 15K 450/300/146 GB 6G SAS 15K 600/450/500 GB SATA 3G 7.2K 2 TB/1 TB/500/250/160 GB	Up to 4 non hot-plug LFF drives: SAS 3G 15K 450/300/146 GB SATA 3G 7.2K 2 TB/1 TB/500/250/160 GB
Maximum internal storage	2.4 TB SAS; 8.0 TB SATA	2.4 TB SAS; 8.0 TB SATA
Form factor	Tower or 4U rack	Tower or 4U rack
Warranty (parts/labor/onsite)	1-year/1-year/1-year; 3-year/1-year (Asia-Pacific region, except Japan)	1-year/1-year/1-year; 3-year/1-year/1-year (only in Brazil)

For HP related offering section on ML110 G5 and ML110 G6, click here.

Entry-level





HP ProLiant ML115 G5 Perfect first server for growing busing

HP ProLiant ML150 G6 Expandable and affordable for

	Perfect first server for growing business	Expandable and affordable for growing businesses
Number of processors	1	1–2
Maximum number of cores	4	8
Processors supported	Quad-Core AMD Opteron processors: 1356: 2.30 GHz, 800 MHz, 75 W 1354: 2.20 GHz, 800 MHz, 75 W 1352: 2.10 GHz, 800 MHz, 75 W Dual-Core AMD Athlon processor: 4450B: 2.30 GHz, 2000 MHz, 45 W Single-Core AMD Athlon processor: 1640B: 2.7 GHz, 2000 MHz, 45 W	Quad-Core Intel Xeon processors: E5540: 2.53 GHz, 1066 MHz, 80 W E5530: 2.40 GHz, 1066 MHz, 80 W E5520: 2.26 GHz, 1066 MHz, 80 W E5506: 2.13 GHz, 800 MHz, 80 W E5504: 2.00 GHz, 800 MHz, 80 W Dual-Core Intel Xeon processors: E5502: 1.86 GHz, 800 MHz, 80 W
Cache	2 MB L2: Opteron Series 1 MB L2: Athlon 4450B 512 KB L2: Athlon 1640B	8 MB (1 x 8 MB) L3 cache: (E5540, E5530, E5520) 4 MB (1 x 4 MB) L3 cache: (E5506, E5504, E5502)
Maximum memory	8 GB	48 GB RDIMM 24 GB UDIMM
Drives supported	Up to 4 non hot-plug LFF drives: SAS 3G 15K 450/300/146 GB 6G SAS 15K 600/450/300 GB SATA 3G 7.2K 2 TB/1 TB/500/250/160 GB SATA 3G 7.2K 2 TB/1 TB/500/250/160 GB	Up to 8 hot-plug LFF drives: 6G SAS 15K 600/450/300 GB SAS 6G 7.2K 2 TB/1 TB SATA 3G 7.2K 2/1 TB/500/250/160 GB Up to 4 Non-hot-plug LFF drives: 6G SAS 15K 600/450/300 GB SATA 3G 7.2K 2 TB/1 TB/500/250/160 GB
Maximum internal storage	2.4 TB SAS; 8.0 TB SATA	16.0 TB SAS; 16.0 TB SATA
Form factor	Tower or 4U rack	Tower or 5U rack
Warranty (parts/labor/onsite)	1-year/1-year/1-year; 3-year/1-year/1-year (Asia-Pacific region, except Japan)	1-year/1-year/1-year; 3-year/1-year (Brazil, Asia-Pacific, excluding Japan)

For HP related offering section on ML115 G5 and ML150 G6, click here.

Entry-level

	HP ProLiant DL120 G6 Entry rack server for dedicated applications	HP ProLiant DL160 G6 Designed for general purpose and compute-intensive environments	HP ProLiant DL160se G6 Designed for general purpose and I/O compute-intensive environments
Number of processors	1	1–2	1–2
Maximum number of cores	4	12	8
Processors supported	Quad-core Xeon processors: X3470: 2.93 GHz, 95 W X3460: 2.80 GHz, 95 W X3450: 2.66 GHz, 95 W X3440: 2.53 GHz, 95 W X3430: 2.40 GHz, 95 W Dual-core Pentium processors: G6950: 2.8 GHz, 73 W G1101: 2.26 GHz, 73 W Dual-core Core processors: i3-540: 3.06 GHz, 73 W Dual-core Xeon processor: L3406: 2.26 GHz, 30 W	Six-Core Xeon processors: X5690: 3.46 GHz, 12 MB L3 cache, 130 W X5680: 3.33 GHz, 12 MB L3 cache, 95 W X5675: 3.06 GHz, 12 MB L3 cache, 95 W X5660: 2.93 GHz, 12 MB L3 cache, 95 W X5650: 2.66 GHz, 12 MB L3 cache, 95 W X5650: 2.66 GHz, 12 MB L3 cache, 95 W E5649: 2.53 GHz, 12 MB L3 cache, 80 W E5645: 2.4 GHz, 12 MB L3 cache, 80 W L5640: 2.26 GHz, 12 MB L3 cache, 80 W C4040: 2.26 GHz, 12 MB L3 cache, 80 W S567: 3.46 GHz, 12 MB L3 cache, 130 W X5672: 3.2 GHz, 12 MB L3 cache, 130 W X5675: 2.93 GHz, 8 MB L3 cache, 95 W X5560: 2.80 GHz, 8 MB L3 cache, 95 W X5560: 2.80 GHz, 8 MB L3 cache, 95 W X5560: 2.80 GHz, 12 MB L3 cache, 95 W X5550: 2.66 GHz, 12 MB L3 cache, 80 W E5640: 2.40 GHz, 12 MB L3 cache, 80 W E5600: 2.13 GHz, 12 MB L3 cache, 80 W E5500: 2.53 GHz, 12 MB L3 cache, 80 W E5500: 2.60 GHz, 8 MB L3 cache, 80 W E5500: 2.60 GHz, 8 MB L3 cache, 80 W E5500: 2.60 GHz, 8 MB L3 cache, 80 W E5500: 2.60 GHz, 8 MB L3 cache, 80 W E5500: 2.60 GHz, 8 MB L3 cache, 80 W E5500: 2.60 GHz, 8 MB L3 cache, 80 W E5500: 2.60 GHz, 8 MB L3 cache, 80 W E5500: 2.10 GHz, 8 MB L3 cache, 80 W E5500: 2.11 GHz, 8 MB L3 cache, 80 W E5500: 2.12 GHz, 8 MB L3 cache, 80 W E5500: 2.13 GHz, 8 MB L3 cache, 80 W E5500: 2.10 GHz, 8 MB L3 cache, 80 W E5500: 2.10 GHz, 4 MB L3 cache, 80 W E5500: 2.10 GHz, 4 MB L3 cache, 80 W E5500: 2.10 GHz, 10 G	E5504: 2.00 GHz, 4 MB L3 cache, 80 W E5520: 2.26 GHz, 8 MB L3 cache, 80 W L5520: 2.26 GHz, 8 MB L3 cache, 60 W E5540: 2.53 GHz, 8 MB L3 cache, 80 W X5550: 2.67 GHz, 8 MB L3 cache, 95 W X5570: 2.93 GHz, 8 MB L3 cache, 95 W E5530: 2.40 GHz, 8 MB L3 cache, 80 W X5560: 2.80 GHz, 8 MB L3 cache, 95 W
cache	8 MB L3 cache 4 MB L3 cache 3 MB L3 cache	12 MB: (1 x 12 MB) shared L3 cache 8 MB: (1 x 8 MB) shared L3 cache 4 MB: (1 x 4 MB) shared L3 cache	8 MB (1 x 8 MB) shared L3 cache (all processors but those listed below) 4 MB (1 x 4 MB) shared L3 cache (E5504)
Maximum memory	16 GB UDIMM 16 GB RDIMM	192 GB RDIMM 48 GB UDIMM	192 GB RDIMM 24 GB UDIMM
IO Accelerator		HP 160 GB SLC PCIe ioDrive; HP 320 GB MLC PCIe ioDrive; HP 320 GB SLC PCIe ioDrive Duo; HP 640 GB MLC PCIe ioDrive Duo; HP 1.28 TB MLC PCIe ioDrive Duo	
Drives supported	Up to 4: Hot plug LFF SAS 15K 300/450/600 GB Hot plug LFF SAS 7.2K 1 TB/2 TB Non Hot plug LFF SAS 15K 300/450/600 GB Hot plug LFF SATA 7.2K 500 GB/1 TB/2 TB Non-Hot plug SATA 7.2K 500 GB/1 TB/2 TB Hot plug SATA 7.2K 160 GB/250 GB Non-Hot plug SATA 7.2K 160 GB/250 GB	Up to 4: Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB Non-hot-plug LFF SATA 7.2K 2 TB/ 1 TB/500/250/160 GB Hot-plug LFF SATA 7.2K 2 TB/ 1 TB/500/250/160 GB Hot-plug LFF SATA 3G 60/120 GB SSD Or Up to 8: Hot-plug SFF SATA 3G 60/120 GB SSD Hot-plug SFF SAS 10K 300/146 GB Hot-plug SFF SAS 15K 72 /146 GB Hot-plug SFF SAS 7.2K 500 GB Hot-plug SFF SATA 7.2K 500/160 GB Hot-plug SFF SATA 7.2K 500/160 GB Hot-plug SFF SATA 5.4K 250/120 GB	Up to 4: Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF 6G SAS 7.2K/2 TB/1 TB Non-hot-plug LFF SATA 7.2K 2 TB/ 1 TB/500/250/160 GB Hot-plug LFF SATA 7.2K 2 TB/ 1 TB/500/250/160 GB Hot-plug LFF SATA 3G 60/120 GB SSD Or Up to 8: Hot-plug SFF SATA 3G 60/120 GB SSD Hot-plug SFF 6G SAS 10K 300/146/72/36 GB Hot-plug SFF 6G SAS 15K 72 GB Hot-plug SFF SATA 7.2K 500/160 GB Hot-plug SFF SATA 5.4K 250/120 GB
Maximum internal storage	8.0 TB	8.0 TB	8.0 TB
Form factor	1U Rack	1U rack	1U rack
Warranty (parts/labor/onsite		3-year parts	3-year parts
	, 5, 5, 5 (5) 1, 1 151 / 113)	0 7001 Pull3	o your puris

For HP related offering section on DL160 G6 and DL160se G6, click here.

Entry-level



HP ProLiant DL165 G7

Designed for low-cost memory and compute-intensive environments



HP ProLiant DL180 G6

Flexible and reliable value server for growing businesses needing expandability

	Designed for low-cost memory and compute-intensive environments	rlexible and reliable value server for growing businesses needing expandability
Number of processors	1–2	1–2
Maximum number of cores	24	12
Processors supported	AMD Opteron 6100 Series processors: 6128: 2.0 GHz, 12 MB L3 cache, 80 W 6128HE: 2.0 GHz, 12 MB L3 cache, 65 W 6132HE: 2.2 GHz, 12 MB L3 cache, 80 W 6134: 2.3 GHz, 12 MB L3 cache, 80 W 6136: 2.4 GHz, 12 MB L3 cache, 80 W 6140: 2.6 GHz, 12 MB L3 cache, 80 W 6164HE: 1.7 GHz, 12 MB L3 cache, 65 W 6172: 2.1 GHz, 12 MB L3 cache, 80 W 6174: 2.2 GHz, 12 MB L3 cache, 80 W 6176: 2.3 GHz, 12 MB L3 cache, 80 W	Six-Core Xeon processors: E5649: 2.53 GHz, 12 MB L3 cache, 80 W E5645: 2.4 GHz, 12 MB L3 cache, 80 W L5640: 2.26 GHz, 1333 MHz, 60 W X5675: 3.06 GHz, 12 MB L3 cache, 95 W X5670: 2.93 GHz, 1333 MHz, 95 W X5660: 2.80 GHz, 1333 MHz, 95 W X5650: 2.66 GHz, 1333 MHz, 95 W Quad-Core Xeon processors: E5606: 2.13 GHz, 8 MB L3 cache, 80 W E5603: 1.6 GHz, 8 MB L3 cache, 80 W E5640: 2.66 GHz, 1066 MHz, 80 W E5630: 2.53 GHz, 1066 MHz, 80 W E5620: 2.40 GHz, 1066 MHz, 80 W E5520: 2.26 GHz, 1066 MHz, 80 W E5520: 2.26 GHz, 1066 MHz, 80 W E5520: 2.26 GHz, 1066 MHz, 80 W E5504: 2.00 GHz, 800 MHz, 80 W E5504: 2.00 GHz, 800 MHz, 80 W L5520: 2.26 GHz, 1066 MHz, 90 W
Cache	12 MB shared L3 cache	12 MB (1 x 12 MB) L3 cache 8 MB (1 x 8 MB) L3 cache 4 MB (1 x 4 MB) L3 cache: (E5504)
Maximum memory	192 GB RDIMM 24 GB UDIMM	192 GB RDIMM 48 GB UDIMM
IO Accelerator		HP 160 GB SLC PCIe ioDrive; HP 320 GB MLC PCIe ioDrive; HP 320 GI SLC PCIe ioDrive Duo; HP 640 GB MLC PCIe ioDrive Duo; HP 1.28 TB MLC PCIe ioDrive Duo
Drives supported	Up to 4: Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF SAS 7.2K 2 TB/1 TB/750 GB Non-hot-plug LFF SATA 7.2K 2 TB/1 TB /500/250/160 GB Hot-plug LFF SATA 7.2K 2 TB/1 TB/500/250/160 GB Hot-plug LFF SATA 3G 60/120 GB SSD Or Up to 8: Hot-plug SFF 6G SAS 10K 300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB	Up to 14: Hot-plug LFF SATA 7.2K 2 TB/1 TB/750/500/250/160 GB Hot-plug LFF SAS 15K 600/450/300/146 GB Hot-plug LFF SAS 7.2K 2 TB/1 TB/750 GB Hot-plug LFF SATA 3G 60/120 GB SSD Or Up to 25: Hot-plug SFF 6G SAS 10K 300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB Hot-plug SFF 6G SAS 7.2 K 500 GB Hot-plug SFF SATA 7.2K 500/160 GB Hot-plug SFF SATA 5.4K 250/120 GB Hot-plug SFF SATA 3G 60/120 GB SSD Or SATA Midline SSD
Maximum internal storage	8.0 TB	28 TB
Form factor	1U rack	2U rack
Warranty (parts/labor/onsite)	3-year parts	3-year parts

For HP related offering section on DL165 G7 and DL180 G6, click here.

HP ProLiant Servers—100 series

Services	HP ProLiant ML110 G5 Perfect first server for growing business	HP ProLiant ML115 G5 Perfect first server for growing business
	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage		
	DAT 320 internal USB/SAS tape drive LTO Ultrium 448/920 internal SAS tape drive Disk Backup D2D2502i/2504i RDX 320/500/750 internal disk backup system HP SC44Ge SAS Host Bus Adapter	DAT 320 internal USB/SAS tape drive LTO Ultrium 448/920 internal SAS tape drive Disk Backup D2D2502i/2504i RDX 320/500/750 internal disk backup system HP SC44Ge SAS Host Bus Adapter
Options		
	2 GB Unbuffered PC2-6400 ECC Memory	2 GB Unbuffered PC2-6400 ECC Memory
Software		
	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, NetWare, VMware, Citrix	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, VMware, Citrix

	HP ProLiant ML110 G6 Perfect first server for growing business	HP ProLiant ML150 G6 Expandable and affordable for growing businesses
Services		
	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage		
	DAT 320 internal USB/SAS tape drive LTO Ultrium 448/920 internal SAS tape drive Disk Backup D2D2502i/2504i RDX 320/500/750 internal disk backup system Smart Array P212 Controller	DAT 320 internal USB/SAS tape drive LTO Ultrium 448/920 internal SAS tape drive Disk Backup D2D2502i/2504i RDX 320/500/750 internal disk backup system Smart Array P212 Controller
Options		
	Lights-Out 100 Advanced Pack Trusted Platform Module (TPM) 1.2 Module Support	750 W Hot-plug Redundant Power Supply kit Lights-Out 100 Advanced Trusted Platform Module (TPM) 1.2 Module Support
Software		
	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, VMware, Citrix

HP ProLiant Servers—100 series

	HP ProLiant DL160 G6 Designed for general purpose and compute-intensive environments	HP ProLiant DL160se G6 Designed for general purpose and I/O intensive compute environments
Services		
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to <u>HP Technology Services</u> section for more details.	Choose from Optimized, Standard, or Basic Care Packages; Please refer to <u>HP Technology Services</u> section for more details.
Storage		
	50/60/70 Modular Smart Array LTO-2 Ultrium 448 SAS tape drive Smart Array P212 Controller	50/60/70 Modular Smart Array LTO-2 Ultrium 448 SAS tape drive Smart Array P212 Controller
Options		
	Hot-plug HDD backplane for third and fourth drive support HP High Efficiency 750 W Power Supply Kit	Hot-plug HDD backplane for third and fourth drive support HP High Efficiency 750 W Power Supply Kit
Software		
	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris, VMware, Citrix	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris, VMware, Citrix

	HP ProLiant DL165 G7 Designed for low-cost memory and compute-intensive environments	HP ProLiant DL180 G6 Flexible and reliable value server for growing businesses needing expandability
Services		
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to <u>HP Technology Services</u> section for more details.	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage		
	50/60/70 Modular Smart Array LTO-2 Ultrium 448 SAS tape drive Smart Array P212 Controller	50/60/70 Modular Smart Array LTO-3 Ultrium 920 SAS tape drive Smart Array P410 Controller
Options		
	Rear SD Card Reader iLO Advanced Pack TPM Module	HP 750 W CS HE Gold Power Supply HP 460 W CS HE Gold Power Supply 8 GB Dual-Rank PC3-8500R Memory
Software		
	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris, VMware, Citrix	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris, VMware, Citrix Automated support: Insight Remote Support

HP ProLiant Servers—300 series

Midrange rack and tower servers with increased expansion to support virtualization, email, and database applications.

Midrange



HP ProLiant ML310 G5p

Engineered to meet the needs of corporate small sites



HP ProLiant DL320 G6

Entry compute power with enterprise management for remote or

	Engineered to meet the needs ot corporate small sites	Entry compute power with enterprise management for remote or space-constrained installations
Number of processors	1	1
Maximum number of cores	4	4
Processors supported	Quad-Core Intel Xeon processors: X3370: 3.0 GHz, 1333 MHz, 95 W X3360: 2.83 GHz, 1333 MHz, 95 W X3330: 2.66 GHz, 1333 MHz, 95 W X3220: 2.40 GHz, 1066 MHz, 95 W Quad-Core Intel Core2 Quad processor: Q9400: 2.66 GHz, 1333 MHz, 95 W Dual-Core Intel Xeon processors: E3120: 3.16 GHz, 1333 MHz, 65 W E3110: 3.00 GHz, 1333 MHz, 65 W Dual-Core Intel Core2 Duo processor: E8400: 3.00 GHz, 1333 MHz, 65 W E6400: 2.13 GHz, 1066 MHz, 65 W Dual-Core Intel Pentium processor: E2160: 1.80 GHz, 800 MHz, 65 W Single-Core Intel Celeron processor: 440: 2.00 GHz, 800 MHz, 35 W	Quad-Core Intel Xeon processors: E5540: 2.53 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5520: 2.26 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5506: 2.13 GHz, 4 MB L3 cache, 80 W, DDR3-800 E5504: 2.00 GHz, 4 MB L3 cache, 80 W, DDR3-800 L5520: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 L5506: 2.13 GHz, 4 MB L3 cache, 60 W, DDR3-800 Dual-Core processors: E5502: 1.86 GHz, 4 MB L3 cache, 80 W, DDR3-800
Cache	12 MB L2: Xeon X3370, X3360 8 MB L2: Xeon X3220, E3110 6 MB L2: X3330, E3120, Q9400, E8400 2 MB L2: E6400 1 MB L2: Pentium E2160 512 KB L2: Celeron 440	4 MB (1 x 4 MB)
Maximum memory	8 GB	8 GB
Drives supported	Up to 4: Hot-plug LFF 6G SAS 15K 600/450/300/146 GB Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB/750 GB Hot-plug LFF SATA 7.2K 2 TB/1 TB/500/250/160 GB Hot-plug LFF SATA 3G 60/120 GB SSD	Up to 4: Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB Hot-plug LFF SATA 7.2K 2 TB/1 TB/500/250/160 GB
Maximum internal storage	8.0 TB	8.0 TB
orm factor	Tower or 5U rack	1U rack
Warranty (parts/labor/onsite	1-year/1-year/1-year; 3-year/1-year/1-year (Asia-Pacific region only)	3-year/3-year

For HP related offering section on ML310 G5p, and DL320 G6, click here.

Midrange



HP ProLiant ML330 G6

Performance and manageability to scale your business

Number of processors	1–2
Maximum number of cores	12
Processors supported	Intel Xeon processor DP family: Six-Core processors: E5649: 2.53 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 E5645: 2.40 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 X5650: 2.66 GHz, 12 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3/4/4
	Quad-Core processors: E5640: 2.66 GHz, 12 MB L3 cache, 80 W, DDR3-1066, HT, Turbo NA/NA/1/1/2/2 E5630: 2.53 GHz, 12 MB L3 cache, 80 W, DDR3-1066, HT, Turbo NA/NA/1/1/2/2 E5620: 2.40 GHz, 12 MB L3 cache, 80 W, DDR3-1066, HT, Turbo NA/NA/1/1/2/2 E5607: 2.26 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 E5606: 2.13 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 E5603: 1.60 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 E5540: 2.53 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5530: 2.40 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5520: 2.26 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5507: 2.26 GHz, 4 MB L3 cache, 80 W, DDR3-800 E5506: 2.13 GHz, 4 MB L3 cache, 80 W, DDR3-800 E5504: 2.00 GHz, 4 MB L3 cache, 80 W, DDR3-800 Dual-Core
	E5503: 2.00 GHz, 4 MB L3 cache, 80 W, DDR3-800 E5502: 1.86 GHz, 4 MB L3 cache, 80 W, DDR3-800
	Intel Xeon processor W3500 UP family: Quad-Core processors: W3540: 2.93 GHz, 8 MB L3 cache, 130 W, DDR3-1066, HT, Turbo 1/1/1/2 W3520: 2.66 GHz, 8 MB L3 cache, 130 W, DDR3-1066, HT, Turbo 1/1/1/2
	Dual-Core processors: W3505: 2.53 GHz, 4 MB L3 cache, 130 W, DDR3-1066 W3503: 2.40 GHz, 4 MB L3 cache, 130 W, DDR3-1066
Cache	12 MB L3 cache (For processors 5600/series) 8 MB L3 cache (all processors supported but those listed above and below) 4 MB L3 cache: E5507, E5506, E5504, E5503, E5502, W3505, W3503
Maximum memory	192 GB RDIMM 48 GB UDIMM
Drives supported	Up to 8: Non-hot-plug LFF SAS 15K: 600/450/300/146 GB Non-hot-plug LFF SATA 7.2K 2 TB/1 TB/750/500/250/160 GB Hot-plug LFF SAS 15K 600/450/300/146 GB Hot-plug LFF SAS 7.2K 2 TB/1 TB/750 GB Hot-plug LFF SATA 7.2K 2 TB/1 TB/750/500/250/160 GB
	Hot-plug LFF SATA 3G 60/120 GB SSD
Maximum internal storage	16.0 TB
Form factor	5U Tower
Warranty (parts/labor/onsite)	3-year/1-year

Midrange



HP ProLiant ML350 G6

Adaptable, reliable mainstay for your business

	Adaptable, reliable mainstay for your business
Number of processors	1–2
Maximum number of cores	12
Processors supported	Intel Xeon processor DP family: Six-Core processors: E5649: 2.53 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 E5645: 2.40 GHz, 12 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 X5675: 3.06 GHz, 12 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 X5670: 2.93 GHz, 12 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3/4/4 X5660: 2.80 GHz, 12 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3/4/4 X5650: 2.66 GHz, 12 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3/4/4 X5650: 2.66 GHz, 12 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3/4/4 X5650: 2.66 GHz, 12 MB L3 cache, 80 W, DDR3-1066, HT, Turbo NA/NA/1/1/2/2 E5630: 2.53 GHz, 12 MB L3 cache, 80 W, DDR3-1066, HT, Turbo NA/NA/1/1/2/2 E5600: 2.40 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo NA/NA/1/1/2/2 E5600: 2.13 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo NA/NA/1/2/2/3/3 E5603: 1.60 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 E5603: 1.60 GHz, 12 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 X5570: 2.93 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 X5550: 2.80 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 1/1/2/2/3/3 X5550: 2.80 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 X5550: 2.80 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 X5500: 2.80 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 X5550: 2.80 GHz, 8 MB L3 cache, 80 W, DDR3-1333, HT, Turbo 1/1/2/2 E5530: 2.40 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5530: 2.40 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 E5500: 2.26 GHz, 8 MB L3 cache, 80
Cache	E5504: 2.00 GHz, 800 MHz, 80 W Dual-Core Xeon processor: E5503: 2.00 GHz, 4 MB L3 cache, 80 W, DDR3-800 E5502: 1.86 GHz, 4 MB L3 cache, 80 W, DDR3-800 12 MB L3 cache (For processors 5600 series) 8 MB L3 cache: (all processors but those listed above and below)
	4 MB L3 cache: E5507, E5506, E5504, L5506, E5503, E5502
Maximum memory	192 GB RDIMM 48 GB UDIMM
IO Accelerator	HP 160 GB SLC PCle ioDrive; HP 320 GB MLC PCle ioDrive; HP 320 GB SLC PCle ioDrive Duo; HP 640 GB MLC PCle ioDrive Duo; HP 1.28 TB MLC PCle ioDrive Duo
Drives supported	Up to 8: Hot-plug LFF SAS 7.2K 2 TB/1 TB Hot-plug LFF SAS 15K 600/450/300/146 GB Hot-plug LFF SATA 7.2K 2 TB/1 TB/750/500/250/160 GB Hot-plug LFF SATA 60/120 GB SSD Up to 16: Hot-plug SFF SAS 10K 300/146 GB Hot-plug SFF SAS 7.2K 500 GB Hot-plug SFF SAS 15K 146/72 GB Hot-plug SFF SATA 7.2K 500/160 GB Hot-plug SFF SATA 5.4K 250/120 GB Hot-plug SFF SATA 5.4K 250/120 GB
Maximum internal storage	16.0 TB
Form factor	Tower or 5U rack
Warranty (parts/labor/onsite)	
The state of the s	• T = V==0 = V==0 = V==0

For HP related offering section on ML350 G6, ${\it click\ here}.$

Midrange



HP ProLiant DL360 G7

Best performance, efficiency, capacity, and reliability in an 1U compute space with ProLiant iLO3 remote management and fault tolerance for space-constrained installations

	space-constrained installations	
Number of processors	1–2	
Maximum number of cores	12	
Processors supported	Six-Core Xeon processors: X5675: 3.06 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5660: 2.80 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5650: 2.66 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 L5640: 2.26 GHz, 1066 MHz, 60 W, HT Turbo: 2/2/3/3/4/4 E5649: 2.53 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/1/1/2/2 E5645: 2.4 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/1/1/2/2 Quad-Core Xeon processors:	
	X5672: 3.20 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/3/3 X5667: 3.06 GHz, 1333 MHz, 95 W E5620: 2.40 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5606: 2.13 GHz, 800 MHz, 80 W, Turbo: N/A E5603: 1.60 GHz, 800 MHz, 80 W, Turbo: N/A L5630: 2.13 GHz, 1066 MHz, 40 W, HT Turbo 1/1/2/2	
Cache	12 MB (1 x 12 MB) L3 cache: (all processor models except for those identified below) 4 MB (1 x 4 MB) L3 cache: (For processors E5506/E5503)	
Maximum memory	384 GB RDIMM (12 x 32 GB for Registered Memory Configurations) 192 GB RDIMM (6 x 32 GB for Max Performance Capacity Registered Memory Configurations) 48 GB UDIMM (12 x 4 GB for Unbuffered Memory Configurations)	
IO Accelerator	HP 160 GB SLC PCIe ioDrive; HP 320 GB MLC PCIe ioDrive; HP 320 GB SLC PCIe ioDrive Duo; HP 640 GB MLC PCIe ioDrive Duo; HP 1.28 TB MLC PCIe ioDrive Duo	
Drives supported	Up to 8: Hot-plug SFF SAS 6G 10K 600/450 GB Hot-plug SFF SAS 6G 10K 300/146 GB Hot-plug SFF SAS 6G 15K 146/72 GB Hot-plug SFF SAS 6G 7.2K 500 GB Hot-plug SFF SATA 3G 7.2K 500/160 GB Hot-plug SFF SATA 3G 5.4K 250 GB Hot-plug SFF SATA 3G 120/60 GB SSD	
Maximum internal storage	4.8 TB	
Form factor	1U Rack	
Warranty (parts/labor/onsite)	3-year/3-year	

For HP related offering section on DL360 G6 and DL360 G7, click here.

Midrange





HP ProLiant DL370 G6

New 4U rack server optimized for virtualization and consolidation environments, well-suited for deployment in growing businesses, remote office sites, or data centers

HP ProLiant ML370 G6

Redesigned tower expandable server optimized for virtualization and consolidation environments, well-suited for deployment in growing businesses, remote office sites, or data centers.

	office sites, or data centers	businesses, remote office sites, or data centers
Number of processors	1–2	1–2
Maximum number of cores	12	12
Processors supported	Six-Core Xeon processors: X5690: 3.46 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/1/1/2/2 X5680: 3.33 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/1/1/2/2 X5675: 3.06 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5670: 2.93 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5660: 2.80 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5650: 2.66 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 E5649: 2.53 GHz, 1333 MHz, 80 W, HT Turbo: 1/1/1/1/2/2 E5645: 2.43 GHz, 1333 MHz, 80 W, HT Turbo: 1/1/1/1/2/2	Six-Core Xeon processors: X5690: 3.46 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/1/1/2/2 X5680: 3.33 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/1/1/2/2 X5675: 3.06 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5670: 2.93 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5660: 2.80 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5650: 2.66 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 E5649: 2.53 GHz, 1333 MHz, 80 W, HT Turbo: 1/1/1/1/2/2 E5645: 2.43 GHz, 1333 MHz, 80 W, HT Turbo: 1/1/1/1/2/2
	Quad-Core Intel Xeon processors: X5687: 3.60 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/2/2 X5677: 3.46 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/2/3/3 X5672: 3.20 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/3/3 X5667: 3.06 GHz, 1333 MHz, 95 W, HT Turbo: 1/1/2/2 E5630: 2.66 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5630: 2.53 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5620: 2.40 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 W5580: 3.20 GHz, 1333 MHz, 130 W, Turbo: 1/1/1/2 X5570: 2.93 GHz, 1333 MHz, 95 W, Turbo: 2/2/3/3 X5560: 2.80 GHz, 1333 MHz, 95 W, Turbo: 2/2/3/3 X5550: 2.66 GHz, 1333 MHz, 95 W, Turbo: 1/1/2/2 E5530: 2.40 GHz, 1333 MHz, 95 W, Turbo: 1/1/2/2 E5530: 2.40 GHz, 1066 MHz, 80 W, Turbo: 1/1/2/2 E550: 2.26 GHz, 1066 MHz, 80 W, Turbo: 1/1/2/2 E550: 2.26 GHz, 1066 MHz, 80 W, Turbo: 1/1/2/2 E550: 2.26 GHz, 1066 MHz, 80 W, Turbo: N/A E5506: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5506: 2.13 GHz, 800 MHz, 80 W, Turbo: N/A E5504: 2.00 GHz, 800 MHz, 80 W, Turbo: N/A E5504: 2.00 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.60 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.60 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.60 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.10 GHz, 1066 MHz, 80 W, Turbo: N/A	Quad-Core Intel Xeon processors: X5687: 3.60 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/2/2 X5677: 3.46 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/2/3/3 X5672: 3.20 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/3/3 X5667: 3.06 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/3/3 E5640: 2.66 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5630: 2.53 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5620: 2.40 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 W5580: 3.20 GHz, 1333 MHz, 95 W, Turbo: 1/1/1/2 X5570: 2.93 GHz, 1333 MHz, 95 W, Turbo: 2/2/3/3 X5560: 2.80 GHz, 1333 MHz, 95 W, Turbo: 2/2/3/3 X5550: 2.66 GHz, 1333 MHz, 95 W, Turbo: 2/2/3/3 E5540: 2.53 GHz, 1066 MHz, 80 W, Turbo: 1/1/2/2 E5530: 2.40 GHz, 1066 MHz, 80 W, Turbo: 1/1/2/2 E5520: 2.26 GHz, 1066 MHz, 80 W, Turbo: 1/1/2/2 E5507: 2.26 GHz, 1066 MHz, 80 W, Turbo: 1/1/2/2 E5607: 2.26 GHz, 1066 MHz, 80 W, Turbo: N/A E5606: 2.13 GHz, 800 MHz, 80 W, Turbo: N/A E5504: 2.10 GHz, 800 MHz, 80 W, Turbo: N/A E5504: 2.13 GHz, 800 MHz, 80 W, Turbo: N/A E5503: 1.60 GHz, 1066 MHz, 80 W, Turbo: N/A E5504: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5505: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5506: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5506: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5506: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.60 GHz, 1066 MHz, 80 W, Turbo: N/A E5600: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5600: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5600: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5600: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A
Cache	E5502: 1.86 GHz, 800 MHz, 80 W, Turbo: N/A 12 MB (1 x 12 MB) L3 cache: (all processors but those listed below) 8 MB (1 x 8 MB) L3 cache: (W5580, X5570, X5560, X5550, E5540, E5530, E5520, E5606, E5606, L5520) 4 MB (1 x 4 MB) L3 cache: (E5506, E5504, E5502, E5603)	E5502: 1.86 GHz, 800 MHz, 80 W, Turbo: N/A 12 MB (1 x 12 MB) L3 cache: (all processors but those listed below) 8 MB (1 x 8 MB) L3 cache: (W5580, X5570, X5560, X5550, E5540, E5530, E5520, E5606, E5606, L5520) 4 MB (1 x 4 MB) L3 cache: (E5506, E5504, E5502, E5603)

For HP related offering section on DL370 G6 and ML370 G6, $\boldsymbol{\text{click}}$ $\boldsymbol{\text{here}}.$

Midrange





HP ProLiant DL370 G6

New 4U rack server optimized for virtualization and consolidation environments, well-suited for deployment in growing businesses, remote office sites, or data centers

HP ProLiant ML370 G6

Redesigned tower expandable server optimized for virtualization and consolidation environments, well-suited for deployment in growing businesses, remote office sites or data centers.

	office sites, or data centers	businesses, remote office sites, or data centers
Maximum memory	192 GB RDIMM (12 x 16 GB) for Registered Memory Configurations 48 GB UDIMM (12 x 4 GB) for Unbuffered Memory Configurations)	192 GB RDIMM (12 x 16 GB) for Registered Memory Configurations 48 GB UDIMM (12 x 4 GB) for Unbuffered Memory Configurations)
IO Accelerator	HP 160 GB SLC PCle ioDrive; HP 320 GB MLC PCle ioDrive; HP 320 GB SLC PCle ioDrive Duo; HP 640 GB MLC PCle ioDrive Duo; HP 1.28 TB MLC PCle ioDrive Duo HP 1.28 TB MLC PCle ioDrive Duo	
Drives supported	Up to 14: Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF SATA 7.2K 2 TB/1 TB/500/250/160 GB Hot-plug LFF SATA 3G 60/120 GB SSD	Up to 14: Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF SATA 7.2K 2 TB/1 TB/500/250/160 GB Hot-plug LFF SATA 3G 60/120 GB SSD
	Up to 24: Hot-plug SFF 6G SAS 10K 600/450/300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB Hot-plug SFF 6G SAS 7.2K 500 GB Hot-plug SFF SATA 5.4K 250/120 GB; 7.2K 500/160 GB Hot-plug SFF SATA 3G 60/120 GB SSD	Up to 24: Hot-plug SFF 6G SAS 10K 600/450/300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB Hot-plug SFF 6G SAS 7.2K 500 GB Hot-plug SFF SATA 5.4K 250/120 GB; 7.2K 500/160 GB Hot-plug SFF SATA 3G 60/120 GB SSD
Maximum internal storage	28.0 TB	28.0 TB
Form factor	4U rack	4U tower
Warranty (parts/labor/onsite)	3-year/3-year	3-year/3-year

For HP related offering section on DL370 G6, and ML370 G6, $\boldsymbol{\text{click here}}.$

Midrange



HP ProLiant DL380 G7

Affordable server with robust features for growing businesses and remote sites

Number of processors	1–2		
Maximum number of cores	12		
Processors supported	Six-Core Xeon Processors: X5690: 3.46 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/1/1/2/2 X5680: 3.33 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/1/1/2/2 X5675: 3.06 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5670: 2.93 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5660: 2.80 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 X5650: 2.66 GHz, 1333 MHz, 95 W, HT Turbo: 2/2/2/2/3/3 E5649: 2.53 GHz, 1333 MHz, 80 W, HT Turbo: 1/1/1/1/2/2 E5645: 2.40 GHz, 1333 MHz, 80 W, HT Turbo: 1/1/1/1/2/2 L5640: 2.26 GHz, 1333 MHz, 60 W, HT Turbo: 2/2/3/3/4/4 Quad-Core Xeon processors:		
	X5687: 3.60 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/2/2 X5677: 3.46 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/2/2 X5672: 3.20 GHz, 1333 MHz, 130 W, HT Turbo: 1/1/2/2 E5640: 2.66 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5630: 2.53 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5620: 2.40 GHz, 1066 MHz, 80 W, HT Turbo: 1/1/2/2 E5600: 2.13 GHz, 1066 MHz, 80 W, Turbo: N/A E5603: 1.60 GHz, 1066 MHz, 80 W, Turbo: N/A L5630: 2.13 GHz, 1066 MHz, 40 W, HT Turbo: 1/1/2/2 E5506: 2.13 GHz, 800 MHz, 80 W, Turbo: N/A		
	Dual-Core Xeon processor: E5503: 2.00 GHz, 800 MHz, 80 W, Turbo: N/A		
Cache	12 MB (1 x 12 MB) L3 cache: (all processor models except for those identified below) 4 MB (1 x 4 MB) L3 cache: (For processors E5506/E5503) 12 MB (1 x 12 MB) L3 cache: (For all 5600 series processors) 8 MB (1 x 8 MB) L3 cache: (For all 5500 series processors)		
Maximum memory	384 GB RDIMM 192 GB RDIMM 48 GB UDIMM		
IO Accelerator	HP 160 GB SLC PCle ioDrive; HP 320 GB MLC PCle ioDrive; HP 320 GB SLC PCle ioDrive Duo; HP 640 GB MLC PCle ioDrive Duo; HP 1.28 TB MLC PCle ioDrive Duo		
Drives supported	Up to 8 (16 with optional second SAS drive cage*): Hot-plug SFF 6G SAS 10K 600/450/300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB Hot-plug SFF 6G SAS 7.2K 500 GB Hot-plug SFF 3G SATA 7.2K 500/160 GB Hot-plug SFF 3G SATA 5.4K 250 GB Hot-plug SFF 3G SATA 120/60 GB SSD		
	Up to 6: Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF 6G SAS 7.2K 2/1 TB Hot-plug LFF 3G SATA 7.2K 2 TB/1 TB/500 GB Hot-plug LFF 3G SATA 7.2K 250/160 GB Hot-plug LFF 3G SATA 120/60 GB SSD		
Maximum internal storage	4.8 TB SFF (9.6 TB with optional second SAS drive cage*)		
Form factor	2U rack		
Warranty (parts/labor/onsite)	3-year/3-year		

For HP related offering section on DL380 G7, click here.

 $^{^{}st}$ Second drive cage requires a storage controller

Midrange



HP ProLiant DL385 G7

Designed with virtualization in mind, yet flexible to support any business need

Number of processors	1–2
Maximum number of cores	24
Processors supported	Twelve-Core AMD Opteron processors: 6180SE: 2.5 GHz, 105 W 6176SE: 2.3 GHz, 80 W 6174: 2.2 GHz, 80 W 6172: 2.1 GHz, 80 W 6166HE: 1.8 GHz, 65 W Eight-Core AMD Opteron processors: 6140: 2.6 GHz, 80 W 6136: 2.4 GHz, 80 W 6132HE: 2.2 GHz, 80 W 6128: 2.0 GHz, 80 W
Cache	12 MB L3 cache
Maximum memory	256 GB (RDIMM) 64 GB (UDIMM)
IO Accelerator	HP 160 GB SLC PCle ioDrive; HP 320 GB MLC PCle ioDrive; HP 320 GB SLC PCle ioDrive Duo; HP 640 GB MLC PCle ioDrive Duo; HP 1.28 TB MLC PCle ioDrive Duo
Drives supported	Up to 8 (16 with optional second SAS drive cage*): Hot-plug SFF 6G SAS 10K 600/450/300/146 GB Hot-plug SFF 6G SAS 7.2K 500 GB Hot-plug SFF 3G SAS 7.2K 500/160 GB Hot-plug SFF 3G SATA 5.4K 250 GB Hot-plug SFF 3G SATA 5.4K 250 GB Up to 6: Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF 6G SAS 7.2K 2/1 TB Hot-plug LFF 3G SATA 7.2K 2/1 TB/500 GB Hot-plug LFF 3G SATA 7.2K 250/160 GB Hot-plug LFF 3G SATA 7.2K 250/160 GB Hot-plug LFF 3G SATA SSD 120/60 GB
Maximum internal storage	4.8 TB SFF (9.6 TB with optional second SAS drive cage*)
Form factor	2U Rack
Warranty (parts/labor/onsite)	3-year/3-year/3-year

For HP related offering section on DL385 G7, click here.

 $^{^{}st}$ Second drive cage requires a storage controller or SAS expander card

HP ProLiant Servers—300 series

	HP ProLiant ML310 G5p Engineered to meet the needs of corporate small sites	HP ProLiant DL320 G6 Entry compute power with enterprise management for remote or space-constrained installations
Services		
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage		
	50/60/70 Modular Smart Array LTO-2 Ultrium 448 SAS internal tape drive Smart Array P212 Controller P4000 SAN and Virtual SAN Appliance	60/70 Modular Smart Array LTO-2 Ultrium 448 SAS Tape Drive Smart Array P212 Controller P4000 SAN and Virtual SAN Appliance
Options		
	T1500 Uninterruptible Power System E200 Controller with battery-backed write cache (BBWC) and 128 MB upgrade	NC360T PCI Express Dual-port Gigabit Server Adapter Modular Power Distribution Unit
Software		
	Management: Insight Control with iLO Advanced Operating systems: Windows, Linux, VMware, Citrix Automated support: Insight Remote Support Virtual storage software: P4000 Virtual SAN Appliance	Management: Insight Control with iLO Advanced Operating systems: Windows, Linux, VMware, Citrix Automated support: Insight Remote Support Virtual storage software: P4000 Virtual SAN Appliance
	HP ProLiant ML330 G6 Performance and manageability to scale your business	HP ProLiant ML350 G6 Adaptable, reliable mainstay for your business
Comisso		
Services		
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Recommend		
Recommend Related		
Recommend Related	Please refer to HP Technology Services section for more details. Modular Smart Array 20 HP Smart Array P410/512M Controller	Please refer to HP Technology Services section for more details. 50/60/70 Modular Smart Array LTO-3 Ultrium 920 SAS internal tape drive Smart Array P410i Controller (standard)
Recommend Related Storage	Please refer to HP Technology Services section for more details. Modular Smart Array 20 HP Smart Array P410/512M Controller	Please refer to HP Technology Services section for more details. 50/60/70 Modular Smart Array LTO-3 Ultrium 920 SAS internal tape drive Smart Array P410i Controller (standard)
Recommend Related Storage	Please refer to HP Technology Services section for more details. Modular Smart Array 20 HP Smart Array P410/512M Controller P4000 SAN and Virtual SAN Appliance ML330 G6 Processor Option Kit	Please refer to HP Technology Services section for more details. 50/60/70 Modular Smart Array LTO-3 Ultrium 920 SAS internal tape drive Smart Array P410i Controller (standard) P4000 SAN and Virtual SAN Appliance 4 GB Quad-Rank PC3-8500R Memory
Recommend Related Storage Options	Please refer to HP Technology Services section for more details. Modular Smart Array 20 HP Smart Array P410/512M Controller P4000 SAN and Virtual SAN Appliance ML330 G6 Processor Option Kit	Please refer to HP Technology Services section for more details. 50/60/70 Modular Smart Array LTO-3 Ultrium 920 SAS internal tape drive Smart Array P410i Controller (standard) P4000 SAN and Virtual SAN Appliance 4 GB Quad-Rank PC3-8500R Memory

HP ProLiant Servers—300 series

HP ProLiant DL360 G7

Most reliable compute power in an 1U Space with ProLiant iLO3 remote management and fault tolerance for space-constrained installations

Services	
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage	
	Smart Array P410i Controller (standard) 60/70/2000 Modular Smart Array DAT 320 USB Tape Drive P4000 SAN and Virtual SAN Appliance
Options	
	10000 G2 Series Rack
Software	
	Management: HP Insight Control with iLO 3 Operating systems: Windows, Linux, Oracle Solaris, VMware, Citrix Automated support: HP Integrated Lights-Out 3

HP	Prol	.iant	DL370	G6

New 4U rack server enhanced for virtualization and consolidation

HP ProLiant ML370 G6

Redesigned 4U tower expandable server enhanced for virtualization

	environments, well-suited for deployment in growing businesses, remote office sites, or data centers	and consolidation environments, well-suited for deployment in growing businesses, remote office sites, or data centers
Services		
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to <u>HP Technology Services</u> section for more details.	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage		
	50/60/70/2000 Modular Smart Array LTO-4 Ultrium 1760 SAS internal tape drive Smart Array P410i Controller (standard) P4000 SAN and Virtual SAN Appliance	50/60/70/2000 Modular Smart Array LTO-4 Ultrium 1760 SAS internal tape drive Smart Array P410i Controller (standard) P4000 SAN and Virtual SAN Appliance
Options		
	T1500 Uninterruptible Power System HP NC375T PCI Express Quad Port Gigabit Server Adapter	T1500 Uninterruptible Power System HP NC375T PCI Express Quad Port Gigabit Server Adapter
Software		
	Management: Insight Control with iLO Advanced Operating systems: Windows, Linux, VMware, Solaris Automated support: Insight Remote Support Virtual storage software: P4000 Virtual SAN Appliance	Management: Insight Control with iLO Advanced Operating systems: Windows, Linux, VMware, Solaris Automated support: Insight Remote Support Virtual storage software: P4000 Virtual SAN Appliance

HP ProLiant Servers—300 series

HP ProLiant DL380 G7

Affordable server with robust features for growing businesses and remote sites

Services	
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage	
	60/70/2000 Modular Smart Array RDX Backup System Smart Array P410i Controller (standard) P4000 SAN and Virtual SAN Appliance
Options	
	NC364T PCI Express Quad-port Gigabit Server Adapter 2x1x16 IP Console Switch with Virtual Media PCI Express
Software	
	Management: HP Insight Control with iLO 3 Operating systems: Windows, Linux, Oracle Solaris, VMware, Citrix Automated support: HP Integrated Lights-Out 3

HP ProLiant DL385 G7

Designed with virtualization in mind, yet flexible to support any business need

Services	
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.
Storage	
	60/70 Modular Smart Array LTO-3 Ultrium 920 SAS tape drive RDX Backup system
Options	
	8 GB 2Rx4 PC3-10600R Memory HP Trusted Platform Module
Software	
	Management: HP Insight Control with iLO 3 Operating Systems: Windows, Linux, Oracle, VMware, Citrix Automated support: HP Integrated Lights-Out for ProLiant

HP ProLiant Servers—500 series

High-end rack and tower servers that help consolidate business-critical application environments while reducing complexity and cost.

High-end





	HP ProLiant DL580 G7 Proven HP performance, manageability, and reliability features with the latest Intel Xeon 7500 series processors	HP ProLiant DL585 G7 Featuring enhanced performance/price, scalability and manageability with the latest AMD Opteron 6000 series processors	
Number of processors	2 or 4	2 or 4	
Maximum number of cores	32	48	
Processors supported	at Core Intel Xeon 7500 series processors: 60: 2.26 GHz, 24 MB cache, 130 W 50: 2.0 GHz, 18 MB cache, 130 W 55: 1.86 GHz, 24 MB cache, 95 W Core Intel Xeon 7500 series processors: 40: 2.0 GHz, 18 MB cache, 105 W 42: 2.66 GHz, 18 MB cache, 130 W ad-core Intel Xeon 7500 series processors: 20: 1.86 GHz, 18 MB cache, 95 W	Twelve Core AMD Opteron 6100 series processors: 6180SE: 2.5 GHz, 12 MB cache, 105 W 6176: 2.3 GHz, 12 MB cache, 80 W 6176SE: 2.3 GHz, 12 MB cache, 105 W 6174: 2.2 GHz, 12 MB cache, 80 W 6172: 2.1 GHz, 12 MB cache, 80 W 6168: 1.9 GHz, 12 MB cache, 80 W 6166HE: 1.8 GHz, 12 MB cache, 65 W 6164HE: 1.7 GHz, 12 MB cache, 65 W 6164HE: 1.7 GHz, 12 MB cache, 65 W 6132: 2.6 GHz, 12 MB cache, 80 W 6132: 2.6 GHz, 12 MB cache, 80 W 6132: 2.0 GHz, 12 MB cache, 80 W 6132: 2.0 GHz, 12 MB cache, 65 W 6128: 2.0 GHz, 12 MB cache, 80 W	
Cache	Up to 24 MB	12 MB	
Maximum memory	1 TB	512 GB	
IO Accelerator	HP 160 GB SLC PCle ioDrive; HP 320 GB MLC PCle ioDrive; HP 320 GB SLC PCle ioDrive Duo; HP 640 GB MLC PCle ioDrive Duo	HP 160 GB SLC PCIe ioDrive; HP 320 GB MLC PCIe ioDrive; HP 320 GB SLC PCIe ioDrive Duo; HP 640 GB MLC PCIe ioDrive Duo; HP 1.28 TB MLC PCIe ioDrive Duo	
Drives supported	Up to 8: Hot-plug SFF 6G SAS 10K 600/450/300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB Hot-plug SFF 6G SAS 7.2K 500 GB Hot-plug SFF 3G SATA 7.2K 500/160 GB Hot-plug SFF 3G SATA 5.4K 250 GB Hot-plug SFF SATA SSD 120/60 GB	Up to 8: Hot-plug SFF 6G SAS 10K 600/450/300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB Hot-plug SFF 6G SAS 7.2K 500 GB Hot-plug SFF 3G SATA 7.2K 500/160 GB Hot-plug SFF 3G SATA 5.4K 250 GB Hot-plug SFF SATA SSD 120/60 GB	
Maximum internal storage	4.8 TB	4.8 TB	
Form factor	4U rack	4U rack	
Warranty (parts/labor/onsite)	3-year/3-year	3-year/3-year	
HP related offerings			
Services			
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details. Choose from Optimized, Standard, or Basic Care Please refer to HP Technology Services section for		
Storage			
	50/60/70/2000 Modular Smart Array LTO-4 Ultrium 1760 SAS tape drive Smart Array P410 Controller P4000 SAN and Virtual SAN Appliance	50/60/70/2000 Modular Smart Array LTO-4 Ultrium 1760 SAS tape drive Smart Array P410 Controller P4000 SAN and Virtual SAN Appliance	
Options			
	TFT7600 Monitor 4x1x16 IP Console Switch with Virtual Media	TFT7600 Monitor 4x1x16 IP Console Switch with Virtual Media	
Software			
	Management: Insight Control with iLO Advanced Operating systems: Windows, Linux, VMware, Solaris Automated support: Insight Remote Support	Management: Insight Control with ilO Advanced Operating systems: Windows, Linux, VMware, Solaris Automated support: Insight Remote Support	

HP ProLiant Servers—700 and 900 series

High-end rack servers that help consolidate business-critical application environments while reducing complexity and cost.

High-end





HP ProLiant DL785 G6 Server series

An ideal server for enterprise-class database, consolidation, and virtualization environments

HP ProLiant DL980 G7 Server series

Scale-up server architected for balanced scaling, self-healing resiliency and breakthrough efficiency

Number of processors	4 or 8	4 or 8							
Maximum number of cores	48	64							
Processors supported	Six core AMD Opteron processors: 8439SE: 2.8 GHz, 105 W ACP 8431: 2.4 GHz, 75 W ACP 8425HE: 2.1 GHz, 55 W ACP	Eight-Core Intel Xeon Processors: X7560: 2.26 GHz, 24 MB cache, 130 W X6550: 2.00 GHz, 18 MB cache, 130 W Six-Core Intel Xeon Processors: E6540 2.00 GHz, 18 MB cache, 105 W Four-Core Intel Xeon® Processors:							
		E7520 1.86 GHz, 18 MB cache, 95 W							
Cache	6 MB L3	Up to 24 MB							
Maximum memory	512 GB	2 TB							
O Accelerator	HP 160 GB SLC PCIe ioDrive; HP 320 GB MLC PCIe ioDrive								
Drives supported	16 [8 (standard) + 8 (optional)] SFF SAS drive bays: Hot-plug SFF 6G SAS 7.2K 500 GB Hot-plug SFF 6G SAS 10K 300/146 GB Hot-plug SFF 6G SAS 15K 146/72 GB Hot-plug SFF SATA SSD 120/60 GB	8 SFF SAS drive bays: Hot-plug SFF 6G SAS 10K rpm, dual port, 300/450/600 GB Hot-plug SFF 6G SAS 15K rpm, dual port, 146/72 GB Hot-plug SFF SATA SSD 120/60 GB							
Maximum internal storage	4.8 TB	2.4 TB							
Form factor	7U rack-mount	8U rack-mount							
Warranty (parts/labor/onsite)	3-year/3-year	3-year/3-year							
HP related offerings									
Services									
Recommend Related	Choose from Optimized, Standard, or Basic Care Packages; Please refer to HP Technology Services section for more details.	3-years Proactive 24 3-years Critical Service							
Storage									
	Embedded RAID support with optional BBWC, RAID 0/1 support 1 removable Slimline DVD/CD-RW Drive P4000 SAN	StorageWorks Disk Enclosure StorageWorks Tape Drive Flash Backed Write cache for embedded RAID controller							
Options									
	HP Smart SAS Expander Card Higher-efficiency power supply unit	HP PCI Express IO Expansion Kit							
Software									
	Management: HP Insight Control with iLO Advanced Operating systems: Windows, Linux, Solaris Automated support: Insight Remote Support	Management: HP Insight Control with iLO Advanced Operating systems: Windows, Linux, VMware, Solaris Automated support: Insight Remote Support							

HP ProLiant Servers—1000 series

Multi-node series is designed to improve efficiency and increase density without additional infrastructure expense. It provides multi-node flexibility with 4-in-1 efficiency.

Multi-node



HP ProLiant DL170h G6

Multi-node flexibility with 4-in-1 efficiency

	The mode not all the time of time of time of the time of t
Number of processors	1–2 per node
Maximum number of cores	4–6 per processor
Processors supported	E5504: 2.00 GHz, 80 W L5506: 2.13 GHz, 60 W E5506: 2.13 GHz, 60 W E5506: 2.13 GHz, 80 W X5550: 2.67 GHz, 95 W E5520: 2.26 GHz, 80 W X5560: 2.80 GHz, 95 W E5530: 2.40 GHz, 80 W X5570: 2.93 GHz, 95 W L5520: 2.26 GHz, 60 W X5670: 2.93 GHz, 95 W L5530: 2.4 GHz, 60 W E5640: 2.66 GHz, 80 W E5540: 2.53 GHz, 80 W L5630: 2.13 GHz, 40 W
Cache	12 MB (1 x 12 MB) shared L3 cache (all 5600 processor models) 8 MB (1 x 8 MB) shared L3 cache (all 5500 series processors but those listed below) 4 MB (1 x 4 MB) shared L3 cache: L5506, E5504, and E5506
Maximum memory	192 GB RDIMM 48 GB UDIMM
Drives supported	Up to 8 LFF: Hot-plug LFF 6G SAS 15K 600/450/300 GB Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB/750 GB Hot-plug LFF SATA 7.2K 2 TB/1 TB/ 750/500/250/160 GB Hot-plug SFF SAS 7.2K 500 GB Hot-plug LFF SATA 3G 60/120 GB SSD Or Up to 16: Hot-plug SFF SAS 10K 300/146 GB Hot-plug SFF SAS 15K 146/72 GB Hot-plug SFF SATA 7.2K 500/160 GB Hot-plug SFF SATA 7.2K 500/160 GB Hot-plug SFF SATA 3G 120/60 GB SSD
Maximum internal storage	16.0 TB
Form factor	2U rack
Warranty (parts/labor/onsite)	1-year/1-year
HP related offerings	
Services	
Recommend Related	3-year, 13x5, same-business-day, 4-hour response 3-year, 24x7 same-day, 4-hour response
Storage	
	50/60/70 Modular Smart Array Smart Array P212 Controller P4000 SAN and Virtual SAN Appliance
Options	
	Dedicated Management Port HP 1200 W CS Platinum Power Supply**
Software	
Jonware	

^{**} Must also order power supply backplane kit.

Multi-node





HP ProLiant DL4x170h G6

HP ProLiant DL2x170h G6

Pre-configured 4-node model Performance and manageability to scale your business

Number of processors	1–2 per node	
	1–2 per node	1–2 per node
Maximum number of cores	4–6 per processor	4 per processor
Processors supported	E5504: 2.00 GHz, 80 W	E5504: 2.00 GHz, 80 W
Cache	4 MB (1 x 4 MB) shared L3 cache	4 MB (1 x 4 MB) shared L3 cache
Maximum memory	48 GB UDIMM	48 GB UDIMM
Drives supported	Up to 8 LFF: Hot-plug LFF 6G SAS 15K 600/450/300/146 GB Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB Hot-plug LFF SATA 7.2K 2 TB/1 TB/750/500/250/160 GB Hot-plug LFF SATA 60/120 GB SSD	Up to 8 LFF: Hot-plug LFF 6G SAS 15K 600/450/300/146 GB Hot-plug LFF 6G SAS 7.2K 2 TB/1 TB Hot-plug LFF SATA 7.2K 2 TB/1 TB/750/500/250/160 GB Hot-plug LFF SATA 3G 60/120 GB SSD
Maximum internal storage	16.0 TB	16.0 TB
Form factor	2U rack	2U rack
Warranty (parts/labor/onsite)	1-year/1-year	1-year/1-year

HP related offerings		
Services		
Recommend Related	3-year, 13x5, same-business-day, 4-hour response 3-year, 24x7, same-day, 4-hour response	3-year, 13x5, same-business-day, 4-hour response 3-year, 24x7, same-day, 4-hour response
Storage		
	50/60/70 Modular Smart Array Smart Array P212 Controller* P4000 SAN and Virtual SAN Appliance	50/60/70 Modular Smart Array Smart Array P410 Controller* P4000 SAN and Virtual SAN Appliance
Options		
	Dedicated Management Port HP 1200 W CS HE Silver Power Supply	Dedicated Management Port HP 1200 W CS HE Silver Power Supply
Software		
	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris

^{*} Must also order LFF SAS Cable Kit

HP ProLiant Servers—6000 series

Enhanced for scale-out customers with an innovative shared infrastructure to greatly reduce costs and increase power efficiency.

Multi-node





OCHUCE	
HP ProLiant SL160z G6	HP Pr
Enhanced for applications needing large amounts of memory and	Enhanc

HP ProL	ant SLI/UZ Go	
Enhanced	for applications needing large inte	ernal storage

	I/O expansion	
Number of processors	1–2	1–2
Maximum number of cores	8	8
Processors supported	Quad-Core Intel Xeon processors: X5570: 2.93 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 X5550: 2.66 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 E5540: 2.53 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5520: 2.26 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5504: 2.00 GHz, 4 MB L3 cache, 80 W, DDR3-800 L5520: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 L5506: 2.13 GHz, 4 MB L3 cache, 60 W, DDR3-800 Dual-Core Intel Xeon processors:	Quad-Core Intel Xeon processors: X5570: 2.93 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 X5550: 2.66 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 E5540: 2.53 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5520: 2.26 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 L5520: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 L5506: 2.13 GHz, 4 MB L3 cache, 60 W, DDR3-800 E5504: 2.00 GHz, 4 MB L3 cache, 80 W, DDR3-800 Dual-Core Intel Xeon processors:
Cache	E5502: 1.86 GHz, 4 MB L3 cache, 80 W, DDR3-800 8 MB (1 x 8 MB) L3 (all processor models except those identified below) 4 MB (1 x 4 MB) L3 (for processors L5506, E5504, E5502)	E5502: 1.86 GHz, 4 MB L3 cache, 80 W, DDR3-800) 8 MB (1 x 8 MB) L3 (all processor models except those identified below) 4 MB (1 x 4 MB) L3 (for processors L5506, E5504, E5502)
Maximum memory	144 GB	128 GB
IO Accelerator	HP 160 GB SLC PCle ioDrive; HP 320 GB MLC PCle ioDrive; HP 320 GB SLC PCle ioDrive Duo; HP 640 GB MLC PCle ioDrive Duo	HP 160 GB SLC PCIe ioDrive; HP 320 GB MLC PCIe ioDrive; HP 320 GB SLC PCIe ioDrive Duo; HP 640 GB MLC PCIe ioDrive Duo
Drives supported	Up to 2: Non-hot-plug LFF SATA 7.2K 160/500 GB, 1 TB/2 TB	Up to 6: Non-hot-plug LFF SATA 7.2K 160/500 GB, 1 TB/2 TB LFF SAS 15K 600/300 GB
Maximum internal storage	4 TB	12 TB
Form factor	1U server tray	1U server tray
Warranty (parts/labor/onsite)	1-year/1-year	1-year/1-year
HP related offerings		
Services		
Recommend Related	3-year, 9x5, next business day 3-year, 13x5, same business day, 4-hour response	3-year, 13x5, same-business-day, 4-hour response 3-year, 24x7, same-day, 4-hour response
Storage		
	1–2 non-hot-plug SATA hard drive bays	50/60/70 Modular Smart Array LTO-3 Ultrium 920 SAS tape drive Smart Array P410 Controller P4000 SAN and Virtual SAN Appliance
Options		
	HP 1200 W CS Platinum Power Supply New Low Power Processors 10U bulk rail kit	HP 1200 W CS Platinum Power Supply 8 GB Dual-Rank PC3-8500R Memory
Software		
	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris Automated Support: Insight Remote Support

Multi-node



HP ProLiant SL2×170z G6

Enhanced for applications needing high-density compute

Number of processors	1–2
Maximum number of cores	8
Processors supported	Intel Xeon Quad-Core processors: X5570: 2.93 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 X5550: 2.66 GHz, 8 MB L3 cache, 95 W, DDR3-1333, HT, Turbo 2/2/3/3 E5540: 2.53 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 E5520: 2.26 GHz, 8 MB L3 cache, 80 W, DDR3-1066, HT, Turbo 1/1/2/2 L5520: 2.26 GHz, 8 MB L3 cache, 60 W, DDR3-1066, HT, Turbo 1/1/2/2 L5506: 2.13 GHz, 4 MB L3 cache, 60 W, DDR3-800 E5504: 2.00 GHz, 4 MB L3 cache, 80 W, DDR3-800 Intel Xeon Dual-Core processor: E5502: 1.86 GHz, 4 MB L3 cache, 80 W, DDR3-800
Cache	8 MB (1 x 8 MB) L3 (all processor models except those identified below) 4 MB (1 x 4 MB) L3 (for processors L5506, E5504, E5502)
Maximum memory	128 GB
Drives supported	Up to 2: Non-hot-plug LFF SATA 7.2K 160/500 GB, 1 TB/2 TB LFF SAS 15K 600/300 GB
Maximum internal storage	4 TB
Form factor	1U server tray
Warranty (parts/labor/onsite)	1-year/1-year
HP related offerings	
Services	
Recommend Related	3-year, 9x5, next business day 3-year, 13x5, same business day, 4-hour response
Storage	
	1–2 non-hot-plug SATA hard drive bays
Options	
	HP 1200 W CS Platinum Power Supply Low Power Processors 10U bulk rail kit
Software	
	Management: Lights-Out 100 Advanced Operating systems: Windows, Linux, Solaris

HP ProLiant Servers

Supported options

	Ent	ry-le	evel_							Mic	dran	ae -							Hie	h-en	ıd.		Мц	lti-no	ode.			
												9-							-1119	61			-1110		ı			2
	ML110 G5	ML110 G6	ML115 G5	ML150 G6	DL160 G6	DL160se G6	DL165 G6	DL165 G7	DL180 G6	ML310 G5p	DL320 G6	ML 330 G6	ML350 G6	DL360 G7	DL370 G6	ML370 G6	DL380 G7	DL385 G7	DL580 G5	DL585 G6	DL785 G6	DL980 G7	DL170h G6	DL4x170h G6	DL2x170h G6	SL 160z G6	SL170z G6	SL2x170z G6
HP hard drives		~	_ <	~						~		~	~			~										S	S	S
Large form factor SAS			•		•	•	•		•	•	•	•	•		•	•	•	•					•	•	•	•	•	•
Large form factor SATA	•		•				•		•		•		•		•	•	•	•					•		•	•		
Small form factor SAS				•	•	•	-	•		•	•	•	•		•	•	•	•	•	•	•		•	•	_	•	•	•
Small form factor SATA			•	•	•	•			•		•		•	•	•	•	•	•	•	-		-	•			•	•	•
Solid State Drives (SSD)						_								•	_	_	•	•	_				_			-	_	
HP memory														-								-						
DDR3 Registered (RDIMMs)			•	•	•				•			•	•	•	•	•	•					•		•*	•*	•	•	•
DDR3 Unbuffered (UDIMMs)	•		•	•	•	•		•	•		•	•	•	•	•	•	•	•					•	•	•	•	•	•
PC2-5300 registered						_								-	_	_							_	_	_	-	_	
PC2-5300 fully buffered																			•									
PC2-6400 registered																				•								
PC2-6400 unbuffered							•			•										-								
HP controllers																												
8-Port SAS HBA																			•									
E200/E200i																		•	•									
E500																			•		•							
P212	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•
P400/400i						_	•			•				-	_	_			•		•	-	_	_	_	•	•	
P410	•	•	•		•	•	•	•	•	•	•	•	•	•					•	•	•		•	•	•	•	•	•
P410i						_	•			•			•	•	•	•	•	•	_		_		_	_	_	-	_	
P411	•		•	•	•	•	•	•	•	•	•	_	•	•	•	•	•	•	•	•	•	•	•	•	•			•
P600	-									•									•		•				_	•		
P800			•		•				•	_			•		•	•			•	•	•		•	•	•		_	
P812					•	•			•		•		•		•	•	•		•	•	•		•	•	•			
256 MB cache	•				•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•
512 MB with BBWC	•						•			•	•		•	•	•	•	•	•	•	•	•		•	•		•	•	•
512 MB with FBWC	-																	•				•					_	
1 GB with FBWC																		•				•						
Battery Kit	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•		•	•	•	•	•	•
Smart Array Advanced Pack (SAAP)	•	•		•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
BBWC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•
Processors																												
Intel Celeron										•																		
Intel Core2 Duo										•																		
Intel Pentium																												
Intel Xeon	•					•			•	•	•	•	•	•	•	•	•		•			•	•	•	•	•		•
AMD Opteron																		•		•								

For additional details on supported options, visit the server QuickSpecs at: $\underline{ www.hp.com/go/quickspecs}$

[•] Supported for this product

^{*} Standard UDIMMs must be replaced with RDIMMs

Manage your ProLiant environment with HP Insight management to unlock your infrastructure's potential. HP Insight Control with iLO Advanced offers essential infrastructure management software, giving you total control of your server infrastructure—onsite or remote. Providing advanced infrastructure management, the HP Matrix Operating Environment servers helps you continuously analyze and optimize your converged infrastructure.

For online readers only: To learn more about the software in the chart below, hover your mouse over the software name to display a URL you can visit for additional information.

Infrastructure management software

	Entry-level Mi											ge							Hig	h-er	nd		Multi-node						
	ML110 G5	ML110 G6	ML115 G5	ML150 G6	DL160 G6	DL160se G6	DL165 G6	DL165 G7	DL180 G6	ML310 G5p	DL320 G6	ML 330 G6	ML350 G6	DL360 G7	DL370 G6	ML370 G6	DL380 G7	DL385 G7	DL580 G5	DL585 G6	DL785 G6	DL980 G7	DL170h G6	DL4x170h G6	DL2x170h G6	SL 160z G6	SL170z G6	SL2x170z G6	
Essential infrastructure manag	geme	ent s	oftw	are																									
Insight Foundation Suite for ProLiant (SmartStart, Firmware Maintenance CD, and Management DVD)										•	•	•	•	•	•	•	•	•	•	•	•	•							
Insight Control, including: Insight Control for Microsoft System Center Insight Control for VMware vCenter										•	•	•	•	•	•	•	•	•	•	•	•	•							
Insight Control for Linux					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Systems Insight Manager (SIM)					•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
Integrated Lights-Out (iLO) Advanced										•	•	•	•	•	•	•	•	•	•	•	•	•							
Lights-Out 100 Advanced	•		•	•	•	•	•	•	•														•	•	•	•	•	•	
Insight Remote Support				•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
Integration with HP Software										•	•	•	•	•	•	•	•	•	•	•									
Advanced infrastructure mana	ıgen	nent	softv	vare																									
Matrix Operating Environment										•	•	•	•	•	•	•	•	•	•	•	•	•							
Insight Capacity Advisor Consolidation software	•		•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•						•	•	•	

For the latest enterprise management integration support, visit: $\underline{\textbf{www.hp.com/servers/integration}}$

[•] Supported for this product

HP related offerings (continued)

Operating systems and virtual environments

Purchase your entire operating environment from HP. HP resells and provides full-service and support for Microsoft Windows operating systems, Red Hat Linux subscriptions, Novell SUSE Linux subscriptions, Citrix XenServer, Microsoft Hyper-V, and VMware hypervisors. Learn more online at: www.hp.com/go/ossupport

	Ent	ry-le	vel							Mic	Iran	ge							Hig	h-er	ıd		Multi-node					
	ML110 G5	ML110 G6	ML115 G5	ML150 G6	DL160 G6	DL160se G6	DL165 G6	DL165 G7	DL180 G6	ML310 G5p	DL320 G6	ML 330 G6	ML350 G6	DL360 G7	DL370 G6	ML370 G6	DL380 G7	DL385 G7	DL580 G5	DL585 G6	DL785 G6	DL980 G7	DL170h G6	DL4x170h G6	DL2x170h G6	SL 160z G6	SL170z G6	SL2x170z G6
Operating environments																												
Microsoft Windows Server Family												Su	por	ted o	on al	l ser	vers											
Novell SUSE Linux Enterprise Server (SLES)	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				•	•	•
Red Hat Enterprise Linux (RHEL)	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
Novell Open Enterprise Server	•		•	•						•		•	•	•	•	•	•	•	•	•	•							
NetWare	•									•		•	•	•	•	•	•		•									
Solaris 10					•	•	•	•	•						•	•			•	•	•	•	•	•	•	•	•	•
Oracle Solaris																		•										
P4000 Virtual SAN Appliance	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•
VMware ESX 4.0	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•
VMware ESXi 4.0												•	•	•	•	•	•	•	•	•	•							
VMware vSphere 4.1																						•						
HP Integrated Citrix XenServer							•	•	•			•	•		•	•	•	•	•	•	•	•	•	•	•	•		

For the latest OS support information, visit: $\underline{\textbf{www.hp.com/go/ossupport}}$

 $Please\ refer\ to\ each\ product's\ quick\ specs\ for\ the\ most\ up-to-date\ hardware\ and\ operating\ system\ support\ details/matrix.$

[•] Supported for this product

HP related solutions

To gain the full value from your investments, you also need expert services across the IT lifecycle, advanced storage devices, and system-enhancing options.

HP options

Complete your data center with HP Server options—including memory, drives, processors, racks, operating system software, and power and cooling. Strengthen the foundation of your data center with high-caliber products that are easy to maintain and tailored for ProLiant, Integrity, and StorageWorks, giving you confidence in your whole infrastructure.

ML/DL networking	
NC112T PCI Express Gigabit Server Adapter	This low-cost Gigabit Ethernet NIC features excellent performance at a very modest price.
NC360T PCI Express Dual-port Gigabit Server Adapter	Here's a high-performance, dual-port adapter that supports a four-lane (x4) PCI Express bus as well as both standard and low-profile slots. The two Gigabit ports allow you to save valuable I/O slots for other uses.
NC364T PCI Express Quad-port Gigabit Server Adapter	This quad-port adapter provides the highest port density for standard and low-profile I/O slots on ProLiant Servers. Compatible with $x4$, $x8$, and $x16$ PCI Express slots, the NC364T has a theoretical maximum transfer rate of 4,000 Mbps.
NC373T PCI Express Multifunction Gigabit Server Adapter	This high-performance adapter for twisted-pair environments supports TCP Offload on Windows and accelerated iSCSI, all on a single card. It supports both standard and low-profile slots.
NC375T PCI Express Quad-port Gigabit Server Adapter	This quad-port adapter helps achieve performance scalability for consolidated server environments at an optimum price.
NC382T PCI Express Dual-port Multifunction Gigabit Server Adapter	Here's a PCI Express card that provides two ports supporting TCP Offload on Windows and accelerated iSCSI, improving server efficiency, and providing access to storage devices over the IP protocol.
NC550SFP Dual Port 10 GbE Server Adapter	This dual port, 8-lane, PCI Express Gen2, 10 GbE network solution offers the best combination of high speed and low latency available in a ProLiant Ethernet adapter. The NC550SFP ships with two SFP+ cages, and is suitable for connecting to a Direct Attach Cable (DAC) or SR fibre optic modules.
Rack and rack accessories	
TFT7600 Rack Keyboard Monitor	Ease deployment of software updates by allowing connection of a USB drive directly at the console. This monitor is designed for rack-mount use and ideal for data centers, corporate computer rooms, and even small and medium business installations where local access to servers is needed at the rack.
100 Series Rack	The 100 series is an ideal rack solution for small- and medium-size organizations with limited IT budgets.
10000 G2 Series Rack	This enterprise-class rack solution combines unparalleled structural integrity, cooling, and cable management. It can be used for all HP rack-mounted server and storage products.
MCS G2	New bi-directional cooling technology makes it possible to simultaneously cool two racks with a single MCS G2 unit. Cool up to 17.5 kW per rack when cooling two racks or up to 35 kW when cooling a single rack.
Consoles and console switches	
Server Console Switches	Integrate keyboard-video-mouse (KVM) and serial devices into a single management console for all of your servers, network devices, and infrastructure. These switches require no software to be installed on target servers, providing a true KVM solution for local system management of up to 256 servers.
IP Console Switches with Virtual Media	Provide local and remote system access and management to a variety of data center devices. These switches require no software to be installed on target servers. Administrators can access KVM functions remotely for day-to-day management. Virtual media support allows for a drive to be mapped on a workstation to target servers to perform application, OS, and firmware upgrades and installations, reducing operational costs and improving efficiency.
Uninterruptible power supplies	(UPS)
T750 Uninterruptible Power Supply	This is an ideal tower UPS for small and medium businesses and desktop/workstation environments. It provides protection from power outages for equipment with power requirements of 500 W and less.
T1500 Uninterruptible Power Supply	Here's a tower UPS that provides power protection for your computer equipment against damage due to fluctuating and inconsistent power with a true power rating of up to 1,500 VA and 900 W.
R1500 Uninterruptible Power Supply	This rack power supply is ideal for space-constrained rack environments with up to 1,500 VA and 1,340 W of power packed in just a 2U rack space.
R3000 Uninterruptible Power Supply	A high-power-density rack power supply in a 2U, rack-mount design offers up to 2,700 W of true power.
R5500 Uninterruptible Power Supply	Offering the highest density rack power supply in a 3U, rack-mount design, the R5500 UPS provides up to 5,000 VA and 4,500 W of true power.
Power distribution units (PDUs)	
Modular PDUs	Available in a variety of capacities and consisting of a core unit and extension strips that can be mounted anywhere in the rack, these PDUs are perfect for many applications. Core-only units are great for BladeSystems.
Monitored PDUs	Available in several sizes, these PDUs monitor power usage inside a rack and provide warnings locally when near capacity to prevent overloads.

To gain the full value from your investments, you also need expert services across the IT lifecycle, advanced storage devices, and system-enhancing options.

HP storage

Network and direct-attached storage devices help you keep large amounts of information protected and readily accessible to people when needed.

rverwork and affect-affactied storage a	evices help you keep large amounts of information protected and readily accessible to people when needed.					
Controllers						
Smart Array P812	Providing the greatest flexibility in connectivity options with 24 total ports to span across internal and external drives the HP Smart Array P812 supports up to 108 drives and ships standard with 1G FBWC and Smart Array Advanced Pack (SAAP).					
Smart Array P411	The HP Smart Array P411 Controller is an external connect card that delivers mission-critical reliability in an easy-to-use RAID solution.					
Smart Array P410	The HP Smart Array P410 delivers basic RAID functionality with an upgrade path to RAID 6, 6+0. It provides uncompromising reliability, scalability, and a rich set of features that can meet your specific storage needs.					
Smart Array P212	The HP Smart Array P212 provides the use of basic RAID functionality and the option to upgrade with the 256 MB BBWC for RAID 5, 5+0. Additional upgrade path to RAID 6 (ADG), 6+0, and other enhancement features are also available through a software license key for the SAAP.					
Hard drives						
HP Midline and Entry SATA 3.5-inch and 2.5-inch hard disk drives	HP Midline and Entry SATA drives provide the best price advantage for non-mission-critical server or storage applications with low workloads of 40 percent or less. Available capacities include: 2 TB, 1 TB, 500 GB, 250 GB, and 160 GB 3G 7.2K RPM 3.5-inch drives, and 500 GB, 160 GB 3G 7.2K and 250 GB 3G, 120 GB 1.5G 5.4K RPM 2.5-inch drives.					
HP Midline and Enterprise SAS 3.5-inch and 2.5-inch hard disk drives	Enterprise SAS drives are ideal for critical, high-duty cycle applications. Available capacities include: 600 GB, 450 GB, 300 GB, 146 GB, 15K RPM 3.5-inch drives, 300 and 146 GB, 10K RPM 2.5-inch drives, and 146 and 72 GB 15K RPM 2.5-inch drives. Midline SAS drives provide redundant paths to your drives for non-mission-critical server or storage applications with I/O workloads of 40 percent or less. Available capacities include 1 TB and 2 TB 7.2K 3.5-inch drives.					
Host bus adapters (HBAs)						
Midline solid state drives	Ideal for high I/O performance, low-latency applications in constrained write workload environments. Available capacities include 60 GB and 120 GB in both SFF and LFF hot-plug carriers.					
SC44Ge SAS HBA	The HP SC44Ge has eight channels with two connectors (one internal/one external) and is the recommended SAS HBA for connecting HP SAS tape products to HP ProLiant Servers.					
SC11Xe SCSI HBA	The HP SC11Xe is an Ultra320 PCI Express SCSI HBA that is ideal for connecting HP SCSI tape products to HP ProLiant Servers.					
U320e SCSI HBA	The HP U320e is a dual-channel PCI Express SCSI HBA that is ideal for connecting HP MSL Tape Libraries to HP ProLiant Servers.					
InfiniBand host channel adapte	ers (HCAs)					
4X QDR InfiniBand HCAs	40 Gbps high-performance adapter supported on PCI Express Gen2 on ProLiant G6 Servers, and mezzanine adapters for BladeSystem server blades.					
4X DDR InfiniBand HCAs	20 Gbps high-performance adapter supported on PCI Express on ProLiant Servers, and mezzanine adapter for BladeSystem server blades.					
Tape drives						
DAT 72 USB tape drive	Combining the reliability and cost-effectiveness of DAT with the universal plug-and-play capabilities of the USB 2.0 interface, this tape drive provides an ideal backup solution for small servers and workstations.					
Ultrium 448 tape drive	This tape backup solution provides an excellent mix of features and value for entry-level and midrange server needs in small and medium-size businesses.					
Storage array systems (SAS)						
Modular Smart Array 20	Here's a SATA disk drive storage enclosure that delivers industry-leading availability, storage density, and upgradeability to meet demanding and growing storage needs. The MSA20 provides an ideal mix of low cost and high capacity, for minimum I/O workloads such as reference data, archival, and disk-to-disk backup.					
Modular Smart Array 50	The MSA50 is ideal for corporate infrastructure applications, including domain controllers, file/print, email, small databases, application servers, Web hosting, messaging, and Citrix terminal services. In S MB locations, the MSA50 is ideal for any environment that can benefit from high-availability features such as hot-plug fans, power supplies, and drives but requires a cost-sensitive solution.					
Modular Smart Array 60	The MSA60 is ideal for the growing storage needs of small and midrange businesses. It supports up to 12 TB per enclosure or up to 96 TB (eight enclosures) capacity supporting 3.5-inch SAS, SATA, or SAS Midline drives in a 2U form factor. Configuration and setup are easy with HP Array Configuration Utility (ACU). Enclosures can be cascaded in a 1+3 configuration, allowing a maximum of 48 drives in an 8U configuration behind each of the two external ports on the HP Smart Array P800 or the HP Smart Array E500 Controller for a total of 96 drives in eight enclosures.					
Modular Smart Array 70	The MSA70 is ideal for the growing storage needs of small and midrange businesses. It supports up to 3.6 TB per enclosure or up to 14.4 TB (four enclosures) capacity supporting 2.5-inch SAS or SATA drives in a 2U form factor. Configuration and setup are easy with HP Array Configuration Utility (ACU). Enclosures can be cascaded in a 1+1 configuration, allowing a maximum of 50 drives in a 4U configuration behind each of the two external ports on the HP Smart Array P800 or the HP Smart Array E500 Controller for a total of 100 drives in four enclosures.					
Shared storage						
Shared storage	When deploying a large number of servers or implementing a server consolidation project, it is the perfect time to look at storage consolidation. An HP SAN, using either HP EVA or XP disk arrays, can increase storage utilization significantly. The HP EVA is one of the easiest-to-manage arrays in the industry and gives the midrange marketplace leading performance, capacity, and availability storage solutions. The XP disk arrays combine a completely redundant hardware platform with unique data replication capabilities that are integrated with clustering solutions for complete business continuity in mission-critical environments. S MB customers and enterprise customers with remote offices are a perfect fit for the P4000 family. Network RAID and other features facilitate data availability and ease of use.					

HP Technology Services

The HP services portfolio is designed specifically for the full spectrum of HP ProLiant server, software, storage, and network deployment and support needs.

Industry-standard servers are increasingly being used to run customers' business-critical applications. IT availability has become a critical issue for many customers' businesses. Research shows that only about 20 percent of system downtime results from technology failure with the other 80 percent resulting from other causes. For these reasons, the customers need support solutions that include more than just uplift of base warranty to higher level of hardware service response. Whether the environment comprises all HP components or a mix of HP and other vendors' technologies, customers can rely on HP server services for the specific know-how.

HP Technology Services meets this challenge with services offered in three packages available for each product group—Optimized Care Package, Standard Care Package, Basic Care Package

Optimized Care: This lifecycle support packaged solutions provide optimum performance and continuous availability of crucial ProLiant systems by delivering efficient deployments and proactive and critical management practices.

Standard Care: This package maintains high level of server availability along with expert help to cut the cost and complexity of implementing and supporting hardware, software, and network environments across the enterprise.

Basic Care: This package delivers minimum recommended support service level with expert advice for best initial solution; faster implementation and life cycle care so that you can focus on your business needs.

	Service Packages (Optimized, Standard, Basic)								
	High-end DL 700 / 900		Mid-range DL 300 / 500			Entry-level DL 100			
	0			0	S	В	0	S	В
Technology Services									
HP Hardware Install Provides installation, setup and testing of ProLiant hardware to assist you in bringing your new hardware into operation in a timely and professional manner		•	•	•	•	•	•	•	•
Install and Startup services for Insight Control Provides installation and basic configuration of HP Insight Control on HP ProLiant Server including installation and configuration of HP Systems Insight Manager		•	•	•	•	•			
Critical Advantage Acts as an end-to-end infrastructure support solution (server, OS/hypervisor, storage, and network) for business-critical applications running on virtualized/x86 infrastructures				•					
3-year 6-hr Call to Repair Hardware Support Decrease hardware downtime with hardware problem resolution within 6-hours of the initial service call		•			•		•		
3-year, 24x7 software support for Insight Control Provides remote software technical support and updates for Insight Control		•	•		•	•			
3-year, 24x7 hardware support, same-business-day, 4-hour response Extend your hardware warranty coverage and increase availability and productivity with around-the-clock response within 4 hours of the service request			•			•		•	
3-year, 13x5 hardware support, same-business-day, 4-hour response Extend your hardware warranty coverage and increase equipment availability and productivity with prompt 13x5 response within 4 hours of the service request									•


HP Financial Services

HP makes it easy on the balance sheet to put the power of the HP portfolio to work for you through HP Financial Services. We offer a complete array of leasing and financial lifecycle management services in more than 50 countries around the world. We can help you transition from existing equipment to the latest technology, acquire a new solution cost-effectively and manage that solution throughout its lifecycle. Our goal is to help you increase the return on your IT investment, reduce risk, and get the most from your HP solution.

For more information on HP Financial Services, visit www.hp.com/go/hpfinancialservices

The right partner

HP knows that when you have the right infrastructure, anything is possible. Look to HP when evaluating how to grow your business and deciding what data center you need to respond to business changes quickly and confidently.



We have a full server portfolio available for this.

Are power and cooling draining your budget?

We deliver tools and solutions to help you regulate and monitor how power is used across the infrastructure.

Do you want the broadest range of technology choice from best-in-class IT providers?

Our partners deliver technology that works best with HP products.

We have the top-selling x86 servers, exceptional management capabilities, and a robust portfolio of hardware and software partners to bring the right solution to you at the right time. HP is the right partner to help your business succeed.

Learn more on how HP ProLiant servers and infrastructure can help you confidently lay the foundation for your converged infrastructure, also to explore more detailed information online, including the latest version of this quide, visit us at: www.hp.com/go/proliant







© Copyright 2009–2011 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are U.S. trademarks of the Microsoft group of companies. UNIX is a registered trademark of The Open Group. Intel, Core2, Pentium, Celeron, and Xeon are trademarks of Intel Corporation in the U.S. and other countries. AMD is a trademark of Advanced Micro Devices, Inc. Oracle is a registered trademark of Oracle and/or its affiliates.

